



请承认书

Version No.: V2.3

常州昊翔电子有限公司
Changzhou HaoXiang Electronic Co., LTD

客户名称

CUSTOMER NAMER : _____

产品名称

COMMODITY : PIEZO BUZZER

产品型号

MODEL NO : TDA-2735Q

客户料号

PART NO : _____

审核	秦皓	主办	潘莲 Jul.05,2021
----	----	----	----------------

客户承认栏			
承认		拒收	

常州昊翔电子有限公司

常州声翔电子有限公司

常州公司:

江苏省常州市戚区潞城镇富民路 259 号

TEL:86-519-88371720 13585451311

Website:www.tda-buzzer.com

E-mail: sales@tda-buzzer.com sales2@tda-buzzer.com sales3@tda-buzzer.com

南通工厂:

江苏如皋市郭元镇工业园辰翔工业区

TEL:86-513-87910588 871919168


A. SCOPE

This specification applies piezo buzzer, **TDA-2735Q**

B. SPECIFICATION


No.	Item	Unit	Specification	Condition
1	Oscillation Frequency	Hz	2700±500	square wave
2	Operating Voltage	Vdc	3~20	
3	Rated Voltage	Vdc	12	
4	Current Consumption	mA	MAX. 17	at 12Vdc
5	Sound Pressure Level	dB	MIN. 75	at 100cm 12Vdc
6	Operating Temperature	°C	-20 ~ +80	
7	Storage Temperature	°C	-30 ~ +100	
8	Dimension	mm	Φ29.5xH19.5	See appearance drawing
9	Leading Pin		Tin Plated Brass(Sn)	See appearance drawing
10	Environmental Protection Regulation		RoHS	

C. APPEARANCE DRAWING

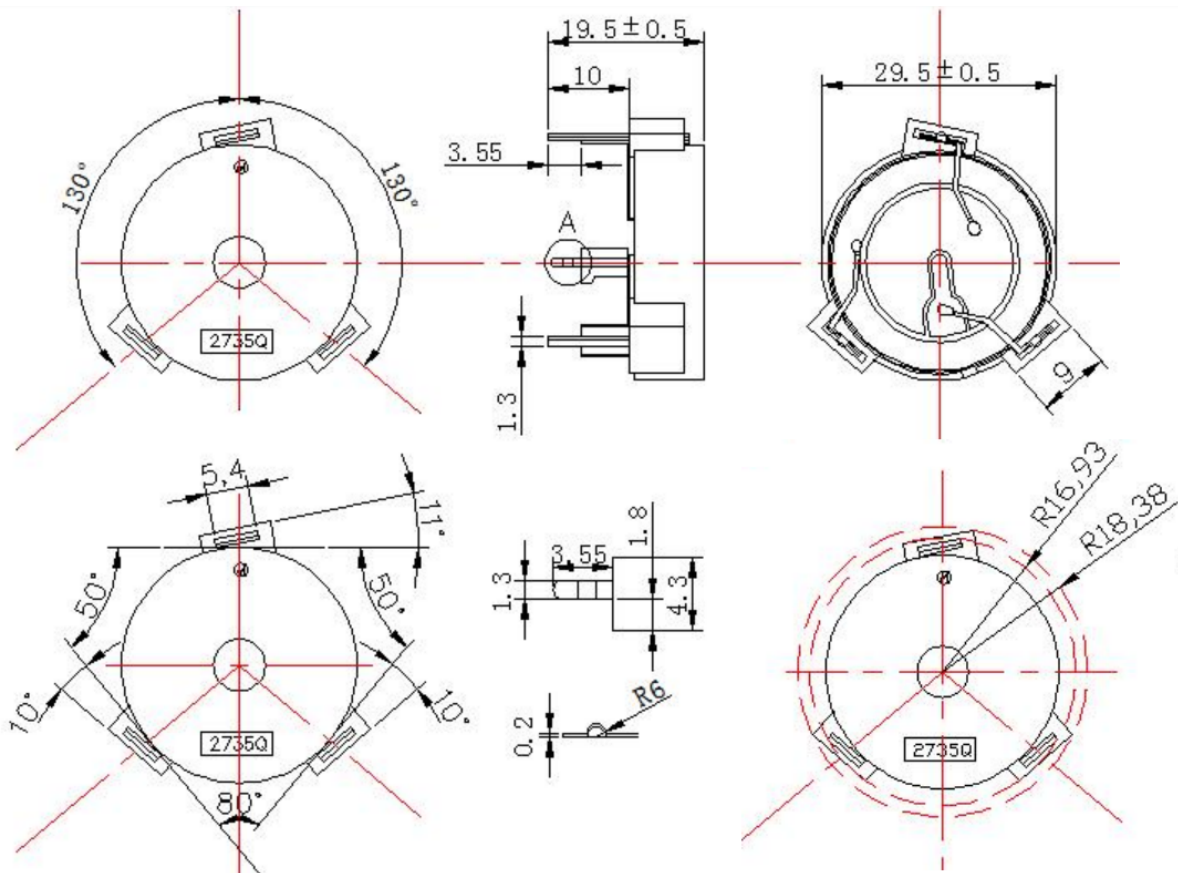

Unit:mm Tolerance : ± 0.5 mm

D. RECOMMEND DIRIVING CIRCUIT

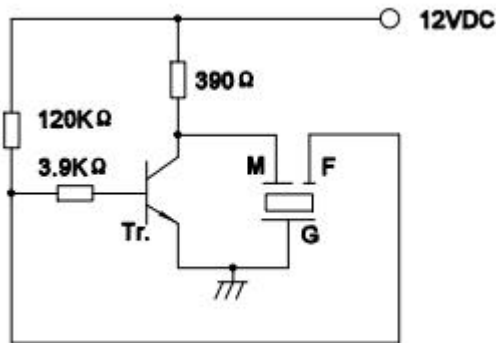

E. MECHANICAL CHARACTERISTICS

NO	Item	Test Condition	Evaluation standard
1	Solderability	Stripped wires of lead wires are immersed in rosin for 5 seconds and then immersed in solder bath of $270 \pm 5^\circ\text{C}$ for 3 ± 0.5 seconds.	90%min stripped wires shall be wet with solder.(except the edge of terminal)
2	Soldering Heat Resistance	Stripped wires are immersed up to 1.5mm from insulation in solder bath of $300 \pm 5^\circ\text{C}$ for 3 ± 0.5 seconds or $260 \pm 5^\circ\text{C}$ for 10 ± 1 seconds.	No interference in operation
3	Terminal Strength Pulling	The force 10 ± 1 seconds of 9.8N is applied to each terminal in axial direction	No damage and cutting off
4	Vibration	Buzzer shall be measured after being applied vibration of 1.5mm with 10 to 55Hz band of vibration frequency to each of 3 per-pendicular directions for 2 hours.	The value of oscillation frequency and current consumption should be in $\pm 10\%$ compared with initial ones. The SPL should be in $\pm 10\text{dB}$ compared with initial one.

F. ENVIRONMENT TEST

NO	Item	Test Condition	Evaluation standard
1	High temp. test	After being placed in a chamber at $100 \pm 2^\circ\text{C}$ for 240 hours	Being placed for 4 hours at 25°C , buzzer shall be measured. The value of oscillation frequency and current consumption should be in $\pm 10\%$ compared with initial one. The SPL should be in $\pm 10\text{dB}$ compared with initial one.
2	Low temp. test	After being placed in a chamber at $-30 \pm 2^\circ\text{C}$ for 240 hours	
3	Humidity test	After being placed in a chamber at $40 \pm 2^\circ\text{C}$ and 90~95%R.H relative humidity for 240 hours	
4	Temp. cycle test	<p>The part shall be subjected to 5 cycles. One cycle shall be consist of:</p>	

TEST CONDITION

Standard Test Condition : a) Temperature : $+5 \sim +35^\circ\text{C}$ b) Humidity : 45-85% c) Pressure : 860-1060mbar

Judgment Test Condition: a) Temperature : $+25 \pm 2^\circ\text{C}$ b) Humidity : 60-70% c) Pressure : 860-1060mbar

G. NOTE CAUTIONS

- a. Can not be applied DC bias voltage and a sounding body or pronunciation elements, otherwise its insulation resistance will decrease and the use of performance degradation.
- b. Can not be imposed over pronunciation body or pronunciation components allows the use of voltage range of the voltage on the.
- c. Please pay attention in welding process, don't let soldering flux invasion into the sound chamber , otherwise flux can cause defect conduction.
- d. Use should handle with care, avoiding direct pressure contact, or inadvertently falling down, to prevent the occurrence of fault, or the generation characteristics of abnormal movements.

H. NOTICE ON PRODUCT STORAGE

- a. Please store the products in room where the temperature / humidity is stable. And avoid such places where there are large temperature changes. Please store the products under the following conditions :

Temperature : -10 to +40 (degree C)

Humidity : 15 to 85% R.H.

- b. Expire date (Shelf life) of the products is 6 months after delivery under the conditions of a sealed and an unopened package. Please use the products within 6 months after delivery.If you store the products for a long time (more than 6months), use carefully because the products may be degraded in the solder-ability and/or rusty.

Please confirm solder-ability and characteristics for the products regularly.

- c. Please use the products immediately after the package is opened, because the characteristics may be reduced in quality, and/or be degraded in the solder-ability due to storage under the poor condition.

I. REVISION

No.	DATE	DESCRIPTION	REMARK	VERSION
1	Jul.05,2021	Initial condition	TDA-2735Q	V2.0
2	Jul.06,2021	Updated drawings	TDA-2735Q	V2.1
3	Aug.03,2023	Updated drawings	TDA-2735Q	V2.2
4	Aug.10,2023	Update drawings	TDA-2735Q	V2.3